

## **Product Submittal Sheet**

Tech Support: 800-746-9885 Sales: 905-218-6797 info@showergrateshop.com showergrateshop.com

# Product Category: DERA-Line WedgeWire Trench Drain Series: 20DLW

#### **OVERVIEW:**

- o 1/8" thick 304 Stainless Steel grate
- o 16 gauge 304 Stainless Steel channel
- o Pre-pitched via break-lines with "Fixed" lengths and centered outlet
- Not site sizeable
- o Indoor or outdoor use
- Works with 2" clamp down floor drain (included)
- Uses Hot Mop, Lead Pan, PVC Vinyl Liner, Rubber Liner (Chloraloy™)
  Copper Pan or Fiberglass waterproofing
- o Grate can be removed completely for cleaning
- Flow rate 9 GPM per outlet\*
- \*Flow rate measured at outlet only. Measurement does not account for water in channel or sheeting on shower floor.

### **GRATE TOP (WedgeWire)** LOWER CHANNEL o Pre-pitched via break-lines with center outlet o 2-1/2" overall width o 1/8" WedgeWire, 304 stainless steel o 2-3/4" overall width Height adjustable o 0.859" depth Heelguard compliant o 2" outlet o Brushed satin finish Wood studs Backerboard Spacers Thinset to allow drainage to weep holes Waterproofing Membrane PVC/CPE Tiles Subfloor Waterproofing Wiremesh Pre-slope Membrane Mudbed 1/4" per foot slope sloped at 1/4" per foot Thinset PVC/CPE




## **Product Submittal Sheet**


Tech Support: 800-746-9885 Sales: 905-218-6797

info@showergrateshop.com showergrateshop.com

# Item Number:

# Product Category: DERA-Line WedgeWire Trench Drain





ength 30, 32, 36, 40, 44, 48, 54, 60

#### CATEGORY: CODE:


#### Install Kit

Plastic (standard) 000 Cast iron CL



Brushed satin (standard) 000 Oil rubbed bronze ORB Matte black MB Matte white MW

\*Additional lead times may occur for finishes other than standard (000)

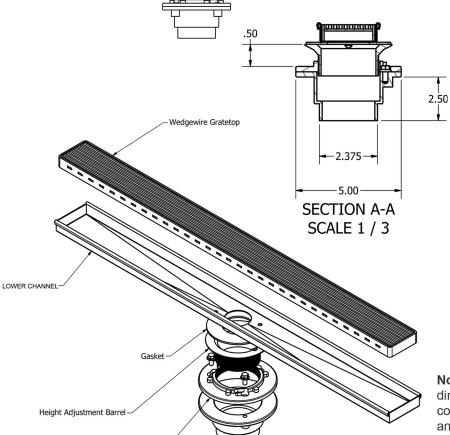

Note: Installer must verify all rough-in dimensions prior to installation and consult local and national codes. Conformity and compliance to local and national codes are the responsibility of the installer.

showergrateshop.com

Installation Kit

This technical content of this page is effective 01/05/15 and supersedes all previous information. Dimension are subject to Manufacturers tolerance and can change without notice.